



With Beamfinder[™] Flip Cover



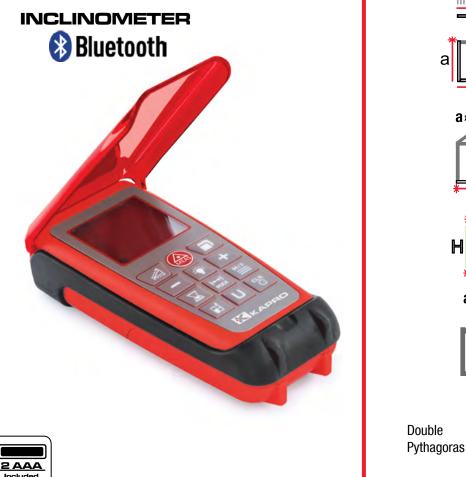

h a.b⇒H m/f



Included

FEATURES

- Measuring range: up to 100m (328')
- Accuracy: ±1.5mm
- BeamFinder[™] flip cover helps you to clearly locate the laser dot on the intended target surface and protects the keypad
- Measures the shortest distance to target with Dynamic (continuous) measuring
- Measures area, volume, Pythagoras
- Choice of 3 reference points
- Integrated inclinometer
- · Bluetooth communication and friendly free application
- Advanced memory function
- Impact-resistant rubber over-mold casing
- Tripod-ready: 1/4" thread
- · Battery indicator



- 1. LCD Display
 - 2. Indirect Measurement I,II & III
 - 3. Subtraction
- 4. Timer
- 5. Reference point
- 6. Clear / Power
- 7. Memory Record/ Recall
- 8. Addition
- 9. Area / Volume
- 10.Measure
- 11. Backlight
- 12. Dynamic Measuring
- 13. Units
- 14. Bluetooth
- 15. Beamfinder[™] Flip cover



Kapro, the Kapro logo, Plumb Site Dual-View vial, Swivel Plumbsite, Optivision Red, Set & Match, Prolaser, Shark, Postrite and Ergo Grip are trademarks and/or registered trademarks of Kapro Industries Ltd ©2018 Kapro Industries Ltd. PS 30.006 Version D